

SHOCK WAVES AND PARTICLE SIZE SEGREGATION IN SHALLOW GRANULAR FLOWS

J.M.N.T. GRAY, Y.C. TAI AND K. HUTTER
*Institut für Mechanik,
Technische Universität Darmstadt,
64289 Darmstadt, Germany*

1. Introduction

Rapid shallow granular free surface flows occur when a surface layer of static granular material becomes unstable or when granular material is released by some mechanism onto an inclined surface. They are abundant all around us from salt in a salt cellar and flow at the free surface of stockpiles, to landslides, rock-falls and snow slab avalanches. Although the length scales vary dramatically the dynamics of the avalanches are similar.

Savage & Hutter [12],[13] exploited the shallowness of these flows to derive a one-dimensional depth averaged theory for the flow of an incompressible Mohr-Coulomb granular material sliding down a rigid surface. Using a slope fitted curvilinear coordinate system Oxz , with the z axis normal to the slope and the x -axis parallel to it, the depth integrated mass and momentum balances reduce to

$$\partial_t h + \partial_x(hu) = 0, \quad (1)$$

$$\partial_t(hu) + \partial_x(hu^2 + \cos \zeta K h^2/2) = hd, \quad (2)$$

where h is the avalanche depth, u is the depth averaged downslope velocity and, ∂_t and ∂_x denote differentiation with respect to time and the downslope coordinate, respectively. The net driving force is the difference between the gravitational acceleration and the Coulomb rate-independent dry friction sliding law

$$d = \sin \zeta - (u/|u|) \tan \delta (\cos \zeta + \kappa u^2), \quad (3)$$

where $\zeta(x)$ is the slope inclination angle, $\kappa = -\partial_x \zeta$ is the slope curvature and δ is the basal friction angle. The system is similar to the shallow water equations of fluid dynamics, however, the earth pressure coefficient K ,

which determines the ratio of in-plane to normal pressure, is a non-linear function of $\partial_x u$ rather than a constant. The earth pressure coefficient approaches two limiting values, *active* and *passive*, dependent on whether the downslope motion is divergent or convergent. These are given by

$$K_{\text{act/pas}} = 2 \sec^2 \phi \left(1 \mp \sqrt{1 - \cos^2 \phi \sec^2 \delta} \right) - 1, \quad (4)$$

where ϕ is the internal angle of friction in the Mohr-Coulomb constitutive relation. The transition between the two states can be achieved either by a jump [12] or a smooth transition [15]. When the internal and basal friction angles are equal, then $K_{\text{act}} = K_{\text{pas}}$, and the equations reduce to a non-strictly hyperbolic system with characteristic wavespeeds $\lambda = u \pm (\cos \zeta K h)^{1/2}$. In this situation the *granular Froude number*, $F_r = |u|/(\cos \zeta K h)^{1/2}$, determines whether the flow is sub- or super-critical. A two-dimensional extension of the theory for modelling granular flow over complex three-dimensional topography has been derived by Gray et al [5].

2. Plane shock waves

Plane shock waves are generated when an obstacle is placed in the flow or when there is a change in the inclination angle during super-critical flow. The shock is marked by a rapid change in the debris flow thickness and velocity and propagates in the opposite direction to the flow. Plane shocks on weakly accelerative slopes play an important role in the process of stratification pattern formation.

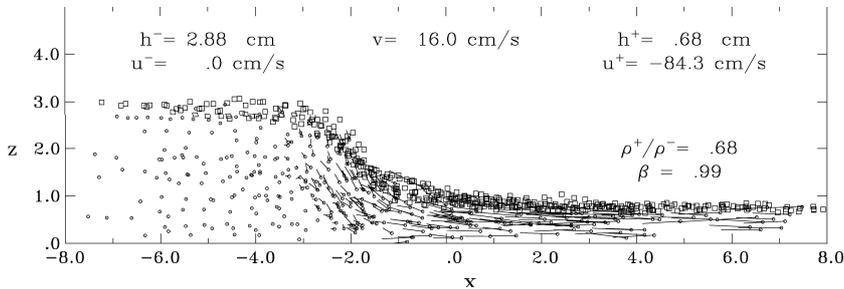


Figure 1. The flow thickness and velocity vectors determined from 16 CCD images are translated and superimposed upon one another to build up a detailed image of the travelling wave. The free surface of the granular material is indicated by a square at each data point. The initial position of each particle is indicated by a circle and its position $1/100^{\text{th}}$ of a second later is indicated by a line segment. All distances are measured in cm and velocities in cm/s.

Figure 1 shows data obtained from 16 CCD images of a travelling plane shock wave. The material enters from the right with a thickness of 0.68 cm

and velocity of 84.3 cm/s, and after the grains pass through the shock the layer is over 4 times thicker and $u = 0$. The wave propagates upslope at a constant speed $v = 16$ cm/s. Discontinuous solutions to the Savage-Hutter model exist, and provide a simple explanation of the jumps. Consider the case when $\phi = \delta$ and $d = 0$ in the governing equations 1–4. A simple solution of the resulting equations is that the avalanche velocity and thickness are constant, i.e. $u = u_0$ and $h = h_0$. Different constant states may be joined together by the mass and momentum jump conditions

$$\llbracket h(u - v) \rrbracket = 0, \quad (5)$$

$$\llbracket hu(u - v) \rrbracket = -\llbracket \cos \zeta K h^2 / 2 \rrbracket, \quad (6)$$

where $\llbracket \rrbracket$ are the jump brackets and v is the normal speed of the non-material singular surface. With these conditions it is a simple exercise to construct a travelling wave solution with $u = 0$ behind the shock.

3. Shock capturing numerical methods

A moving grid (Lagrangian) finite difference scheme was developed to solve a reduced non-conservative form of the equations by Savage & Hutter [11]. This method has proved to be a particularly effective numerical integration scheme for smooth solutions [1], [6], [7], [8] and [17]. However, when there are large gradients, or non-smooth solutions, numerical oscillations develop which cause numerical instabilities.

Two one-dimensional methods have been applied to numerically capture plane shock waves. The first is a modified Total Variational Diminishing Lax Friedrichs (TVDLF) method [16], [18] and the second is a Non-Oscillating Central (NOC) scheme [9], [10]. Both of these methods use Eulerian grids and do not rely on a known solution to the Riemann problem. A comparison between the exact plane shock wave solution on non-accelerative slopes and the TVDLF and NOC schemes is illustrated in figure 2, and demonstrates that these high resolution methods are very effective at capturing the travelling wave.

4. Stratification patterns in heaps

When a granular material with grains of two differing sizes is poured into the vertical gap between thin plates from a point source a triangular heap is built up. Although the material is continuously deposited at the top of the pile, it does not flow immediately down the faces because of the difference between the static and dynamic internal friction angles. Once the static friction angle is exceeded the avalanche flows down the face of the pile and *kinetic sieving* takes place [11], [14], which sorts the granular

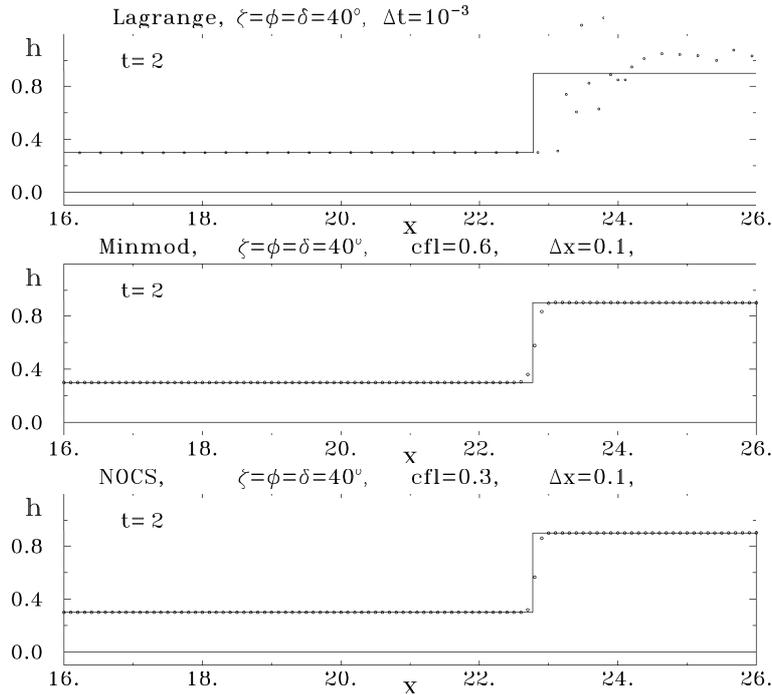


Figure 2. Comparison of analytic plane shock wave solution (solid line) for the thickness, h , with the computed thickness distribution (circles) as a function of space x . The granular material flows from left to right and increases rapidly in thickness at the shock. The results are illustrated for the original Lagrangian method (top) the modified TVDLF method (middle) and the NOC scheme (bottom).

material by grain size. Kinetic sieving is the name given to the process whereby gaps open up between the grains, as they are sheared, and the smaller particles are more likely to fall into open space beneath them, than the large particles, because they are more likely to fit into the available space. An *inverse-grading* of the particles rapidly develops with the larger particles overlying the smaller ones. In a bi-disperse granular mixture this creates a two-layer stripe close to the free surface. When the front of the avalanche reaches the run-out zone a plane shock wave is generated, which propagates upslope and *freezes* the stripe into the granular deposit as shown in figure 3. Successive releases create a large scale stratification pattern.

A simple mixture theory has been developed [4] to model stratification pattern formation. The volume fraction of small particles per unit mixture volume, $0 \leq \nu \leq 1$, is defined and it is assumed that the remaining space $1 - \nu$ is occupied by large particles. Assuming that the volume fraction of small particles has no influence on the dynamics of the bulk mixture

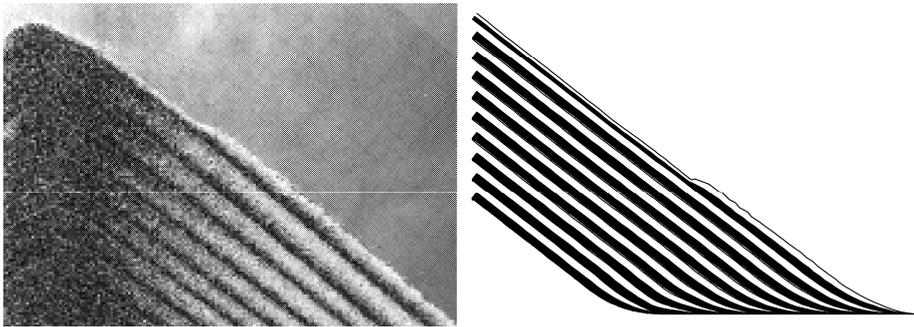


Figure 3. Stratification pattern formation in a bi-disperse grain size population of large (white) particles and small (grey) particles. The uppermost pair of dark and white layers prior to the upslope propagating shock are avalanching downslope. Behind the shock, which can be seen as a rapid increase in the avalanche thickness in the experiments (left) and the simulation (right), the material is at rest. All the material below the top two layers is also at rest.

the Savage-Hutter theory can be used to compute the avalanche thickness and the downslope velocity. The normal velocity can then be inferred from the incompressibility relation together with the basal boundary condition. The experiments suggest that the time-scale for kinetic sieving to take place is much faster than the time-scale for the avalanche motion. It is therefore assumed that the grains are initially presorted when they are input into the flow and a tracer equation is used to follow the local particle size distribution. The results of numerical simulations are shown in figure 3. The avalanche propagates downslope transporting the initial particle size distribution with it. When it reaches the run-out plane the gravity forcing ceases and a granular shock develops, which propagates upslope with approximately constant speed. Successive layers are built up by defining the old free surface of the avalanche to be the new basal topography for the next avalanche to run down. In this way large scale stratification patterns are built up.

5. Stratification and segregation patterns in thin rotating drums

In rotating drums the granular flow is divided into two distinct regions that are separated by a non-material singular surface, at which there are discontinuities (jumps) in the velocity and density fields. Close to the inclined free surface there is a thin fluid-like avalanche, and below it there is a solid layer that rotates about the axis of revolution. Strong mass transfer takes place between the fluid and solid regions. The material that is transported by the avalanche to the base of the inclined slope, is then absorbed by the solid body and rotated back up to the top of the slope, where it replenishes

the avalanche.

A series of particle size segregation experiments have also been performed in thin rotating drums. To emphasise the patterns the disk was laid horizontally and gently shaken so that all the small particles fell to the bottom. Once returned to the vertical one side of the disk is filled with large (white) particles and the other side is filled with small (grey) ones. When the disk is rotated at a constant rate (110 seconds per revolution) intermittent avalanches are formed at the free surface. The intermittency again stems from the difference between static and dynamic internal friction angles. The central circular core of material remains completely undisturbed by slow rotation of the drum. Each avalanche release sorts the material, forming a stripe, which is frozen into the deposit by the shock wave and subsequently rotated and buried in the undisturbed material below the free surface. Subsequent releases create a sequence of stripes tangent to the central core, which create a *Catherine wheel* effect as shown in figure 4.

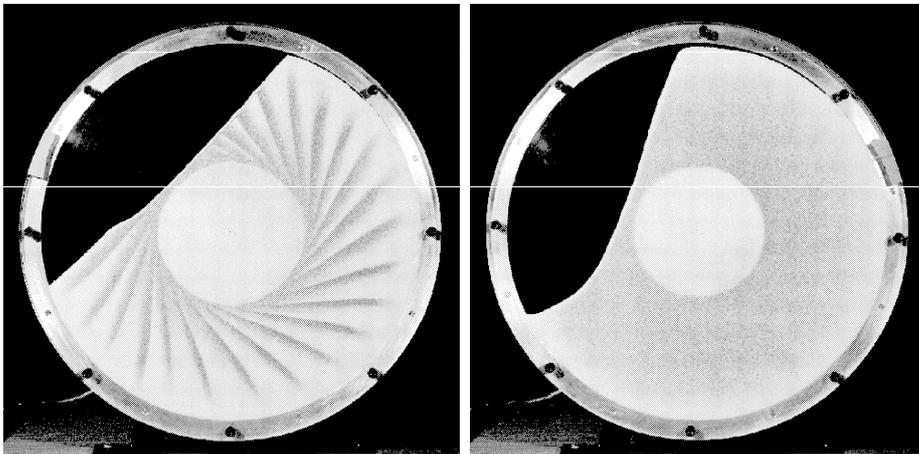


Figure 4. Pattern formation due to particle size segregation in a thin rotating disk at low (left) and fast (right) revolution rates. The large particles are white and the small particles are grey. The drum is rotated slowly counter clockwise and contains a bi-disperse mixture of grain sizes.

At faster rotation rates (< 20 seconds per revolution) the intermittency of the avalanche release, the shock waves and the stripes disappear and a steady flow regime dominates. The material is continuously released on the upper side and continuously deposited on the lower side of the concave free surface and is transported between the two positions by a quasi-steady avalanche in which kinetic sieving takes place. Since the smaller particles are concentrated at the bottom of the avalanche they are the first to get deposited on the lower half of the free surface and a new pattern develops in which the central core is undisturbed, and there is a continuous distribution

of grain sizes outside the central core, starting with a high concentration of small particles near the core and ending with a high concentration of large particles near the outer wall.

Acknowledgement

This research was supported by the Deutsche Forschungsgemeinschaft through the SFB 298 project “Deformation und Versagen bei metallischen und granularen Strukturen”.

References

1. Koch, T., Greve, R. and Hutter, K.: Unconfined flow of granular avalanches along a partly curved surface, Part II: Experiments and numerical computations. *Proc. R. Soc. London A* **445** (1994), 415-435.
2. Gray, J.M.N.T. and Hutter, K.: Pattern formation in granular avalanches. *Contin. Mech. Thermodyn.* **9**(6) (1997), 341-345.
3. Gray, J.M.N.T. and Hutter, K.: Physik granularer Lawinen. *Physikalische Blätter* **54**(1) (1998), 37-43.
4. Gray, J.M.N.T. and Tai, Y.C.: Particle size segregation, granular shocks and stratification patterns. NATO ASI series, H.J. Herrmann et al. (eds.), *Physics of dry granular media*, 697–702. Kluwer Academic 1998.
5. Gray, J.M.N.T., Wieland, M. and Hutter, K.: Free surface flow of cohesionless granular avalanches over complex basal topography. *Proc. Roy. Soc.* **445** (1999), 1841-1874.
6. Greve, R., Koch, T. and Hutter, K.: Unconfined flow of granular avalanches along a partly curved surface. Part I: Theory. *Proc. R. Soc. London, A* **445** (1994), 399-413.
7. Hutter, K. and Koch, T.: Motion of a granular avalanche in an exponentially curved chute: experiments and theoretical predictions. *Phil. Trans. Roy. Soc. A* **334** (1991), 93-138.
8. Hutter, K. and Greve, R.: Two-dimensional similarity solutions for finite mass granular avalanches with Coulomb and viscous-type frictional resistance. *J. Glac.* **39** (1993), 357-372.
9. Jiang, G. and Tadmor, E.: Non-oscillatory central schemes for multidimensional hyperbolic conservation laws. *SIAM J. Sc. Comp.* **19**(6) (1997), 1892–1917.
10. Nessyahu, H. and Tadmor, E.: Non-oscillatory central differencing for hyperbolic conservation laws. *J. Comput. Phys.* **87** (1990), 408–463.
11. Savage, S.B. and Lun C.K.K.: Particle size segregation in inclined chute flow of dry cohesionless granular solids. *J. Fluid Mech.* **189** (1988), 311-335.
12. Savage, S.B. and Hutter, K.: The motion of a finite mass of granular material down a rough incline. *J. Fluid Mech.* **199** (1989), 177-215.
13. Savage, S.B. and Hutter, K.: The dynamics of avalanches of granular materials from initiation to runout. Part I: Analysis. *Acta Mech.* **86** (1991), 201-223.
14. Savage, S.B.: Mechanics of granular flows. In Hutter K. (ed.) *Continuum mechanics in environmental sciences and geophysics*. CISM No. 337 Springer, Wien-New York, 1993, pp467-522.
15. Tai, Y.C. and Gray, J.M.N.T.: Limiting stress states in granular avalanches. *Anal. Glac.* **26** (1998), 272–276.
16. Tóth, G. and Odstrčil, D.: Comparison of some flux corrected transport and total variation diminishing numerical schemes for hydrodynamic and magnetohydrodynamic problems. *J. Comput. Phys.* **128**(1) (1996), 82–100.
17. Wieland, M., Gray, J.M.N.T., and Hutter, K.: Channelised free surface flow of cohesionless granular avalanches in a chute with shallow lateral curvature. *J. Fluid. Mech.*

- 392** (1999), 73-100.
18. Yee, H.C.: *A class of high-resolution explicit and implicit shock-capturing methods.* NASA TM-101088, 1989.